



## CM/CL SERIES

### Step-in Coolers & Freezers

#### COOLERS

- CM-3-50
- CM-156-50
- CM-156-75

#### FREEZERS

- CL-5-75
- CL-5-100
- CL-156-100
- CL-156-200

### FEATURES

#### CONSTRUCTION

- Self-contained models intended for indoor use only
- Assembled storage space capacity:
  - CM-3-50, CL-5-75 & CL-5-100 ..... 95 cu. ft.
  - CM-156-50, CM-156-75, CL-156-100 & CL-156-200 ..... 156 cu. ft.
- Prefabricated, metal-clad panel construction
- .080 textured aluminum interior floor with stainless steel door sill plate
- Low profile, top mounted interior evaporator coil for extra clearance (low profile, top mounted interior fan housing in CM-3-50 model)
- Highly visible, exterior-mounted digital thermometer
- Moisture-proof interior lamp
- Exterior light switch with pilot indicator light
- Low wattage emergency light
- CM models feature 8 foot long power cord with molded plug
- 4" thick 97% closed cell rigid, pour-type foamed-in-place "zero ODP" urethane insulation

#### FINISH

- 26 gauge acrylic-coated stucco galvanized walls interior and exterior

#### DOOR

- Infitting type (28" x 63" clear opening) with self-closing spring-loaded hinges
- Hydraulic door closure (CM-156 & CL-156 models only)
- Magnetic, replaceable vinyl door gaskets
- Adjustable hinge backing plates
- Deadbolt-locking handle with pad locking provision
- Inside safety release
- Freezer models contain electric door perimeter warmer cable system

#### REFRIGERATION

- Factory-assembled, roof mounted refrigeration with thermostatic air control
- CL models feature hermetic compressors with expansion valve, electric defrost and defrost termination/fan delay control

- CM models feature hermetic compressors with capillary tube metering
- 22" vinyl tubing drain line
- Temperature ranges:
  - CM models ..... 34° to 41°F (1° to 5°C)
  - CL-5-75 & CL-156-100 ..... 0° to -10°F (-18° to -24°C)
  - CL-5-100 & CL-156-200 ..... 0° to -20°F (-18° to -29°C)

#### WARRANTY

- Standard limited one year compressor (optional four year available), one year limited parts and labor, limited 15 year panel

#### OPTIONS

- Remote refrigeration systems
- Four year extended compressor warranty
- Automatic condensate evaporator
- Welded wire, chrome-plated shelving





# CM/CL SERIES STEP-IN COOLERS & FREEZERS

## TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. LB/KG
	L	D	H*	L	D	H*						
<b>COOLERS (SELF-CONTAINED MODELS FOR INDOOR USE ONLY)</b>												
CM-3-50	64	51	88 <sup>13/16</sup>	1626	1295	2254	115	10.3	1/2	95.0	165.0	841/381
CM-156-50	70	70	92 <sup>3/4</sup>	1778	1770	2350	115	10.3	1/2	156.0	182.5	1110/503
CM-156-75	70	70	92 <sup>3/4</sup>	1778	1770	2350	115	13.8	3/4	156.0	182.5	1135/515
<b>FREEZERS (SELF-CONTAINED MODELS FOR INDOOR USE ONLY)</b>												
CL-5-75	64	51	88 <sup>13/16</sup>	1626	1295	2256	115	18.7	3/4	95.0	165.0	891/404
CL-5-100	64	51	88 <sup>13/16</sup>	1626	1295	2256	115/208-230	1.3/12.1	1	95.0	165.0	896/406
CL-156-100	70	70	92 <sup>3/4</sup>	1778	1770	2356	115/208-230	1.6/8.5	1	156.0	182.5	1150/522
CL-156-200	70	70	96 <sup>1/4</sup>	1778	1770	2432	115/208-230	1.6/18.1	2	156.0	182.5	1190/540

\*Height includes refrigeration unit mounted in roof panel.

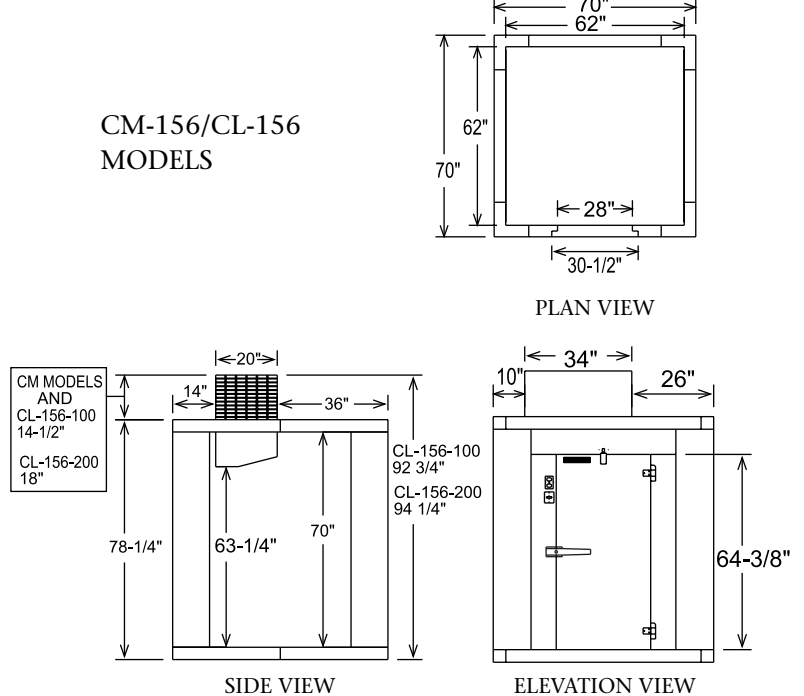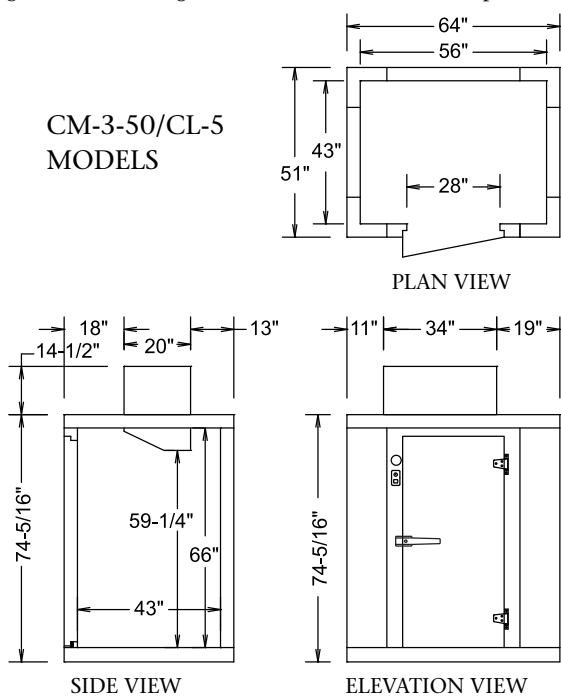


## LISTINGS




Factory Mutual System approval for panels only.

## HOOKUP

CM-3-50: Via plug in, 10 foot long, flexible 3 wire 16/3 cord with molded plug.  
 CM-156-50 and CM-156-75: Via plug in, 10 foot long, flexible 3 wire cord (CM-156-50 with 16/3 cord, CM-156-75 with 14/3 cord) with molded plug.  
 CL-156 models: Hardwired with separate junction boxes for 115V and 208-230V.  
 CL-5-75: Hardwired for 115/60/1.  
 CL-5-100: Hardwired with separate junction boxes for 115/60/1 and 208-230/60/1.



NEMA 5-15P (CM-3-50 and CM 156-50)



NEMA 5-20P (CM 156-75)

**NOTE:** Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.



908 Highway 15 North • New Albany, MS 38652  
 PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com

